

SEALOXY




SEALOXY

Internal walls under coat
External Walls
Terrace, Ceiling, or Slab.
R C C. Structure

**JUST
TWO COATS
PROTECTS
A
LOT**



SEALOXY
Reliability Inside

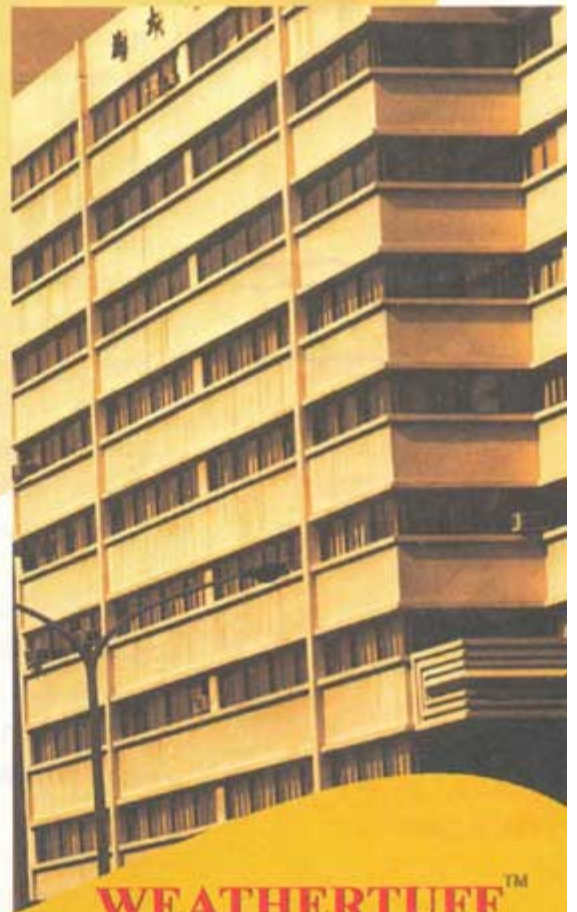


WEATHERTUFF™
SEALOXY

Flexible, Waterbase, Waterproof under coat

WEATHERTUFF™ SEALOXY



SEALOXY
AN
EFFECTIVE
UNDER COAT

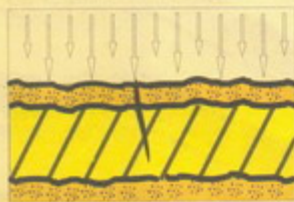

SEALOXY
PROTECTION
AGAINST EXPANSION



SEALOXY
60 Sq. ft.
In two coats

Moisture, that kills your paint is present in walls where proper construction is not ensured Good COPING at plinth level and over the ground level eliminates capillary suction of ground water and salt in walls.

Similarly good plaster on walls reduces rain water seepage by capillary action, into the building.

Weatheruff **SEALOXY** an effective undercoat helps your indoorwalls against minor moisture problems and keeps paint undamaged. It also helps preventingmoisture penetration, when applied on outer wall.

Dry **SEALOXY** Film is thin ,flexible, stable and transparent. It cross linking polymers when added to lime or cement paint ensures batter adhesion. When applied on dry plastered walls It fills porosity in the plaster and make it water resistant. Flexible film of **SEALOXY** provide protection against expansion and contraction caused by variations of heat and cold in the atmosphere. Hence, the colour applied on coating does not crack and chip.

Almost all waterbase colours can be easily applied on **SEALOXY**. It is economical too, as it spreads over almost 50 to 60 Sq. ft. in two coats. Try the longer - lasting better moisture preventive **SEALOXY** today.

SEALOXY is available at all prominent Paint and Hardware shops.

IDEALLY USEFUL FOR

Internal walls as undercoat.
External walls
Terrace, Ceiling or Slab.
R C C Structure.

SEALOXY. SPECIAL FEATURE,

SEALOXY is an effective polymer. which enhance performance of lime. Add 5 % of **SEALOXY** in 5 kg cured lime. It will give batter adhesion and longer life to lime wash. There is no need to add to Glue or Alum.

Simillarily for cement paints als. **SEALOXY** can be used.

HOW TO APPLY. SEALOXY

Clean the surface perfectly on which **SEALOXY** is to be applied
Apply the first coat of **SEALOXY** by Brush of Spray. Let the first coat dry for 2-3 hours. Then apply another coat of **SEALOXY**.

SEALOXY give 50 to 60 sq.feet jof covarage per litre iin two applications (coats) on smooth surface.

SEALOXY

Also can apply as Primer coat for SEALER COAT & INULTEC

The information in the folder is the best if our knowledge but it does not stands as guaranty or warranty as the manufacturers have no control over the condition of the place where **SEALOXY** is to be applied or the method of application/
It is advisable to apply on a sample patch of the construction before using **SEALOXY** on unusual or extensive area

Marketed by :

WEATHERTUFF MARKETING

202, Sarthak Complex-II, Nr. Swastik Char Rasta,

Navrangpura, Ahmedabad-380 009. Gujarat (INDIA)

Ph : 079-26562100, 26564777, Tele Fax : 91-79-26564777

Email : insultec@icenet.net Website : www.weatheruff.com



Manufactured by :

CHITRA INSULTEC PVT. LTD.

Ahmedabad-380 009. Gu arat INDIA