


# Weather Tuff®

Building Surface Solutions



# Tilefix

Non-Skid Polymeric  
modified tile fixing  
adhesive.

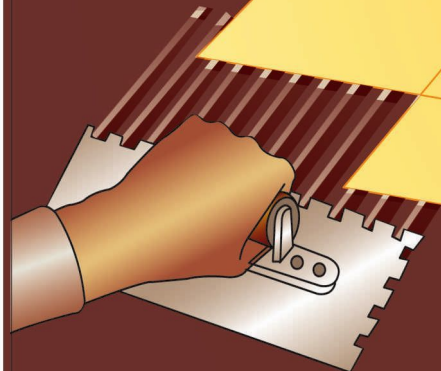

# Weather Tuff®

Building Surface Solutions



**TileFix** : Non-Skid Polymeric modified tile fixing adhesive.  
(N.S.A.)

**Description** : Tile Fix is a single component grey / white colour powder made out of cement, Dry Polymers & Cellulose derivatives. It is recommended for fixing Ceramic tiles, Marbles & Mosaic tiles on exterior & interior surface of the wall & floor. It can also be used for fixing new tile on the old tile surfaces.

#### Advantages :

- Soaking of tiles are not required.
- It covers the entire area, so it also makes the surface waterproof with no extra cost.
- No curing is required after fixing of tiles.
- Surface doesn't requires hacking for fixing the tiles.
- Tile fixing work can be done very fast compared to conventional method.
- It saves labour & time drastically.

#### Uses :

- Fixing of all types of Tiles.
- Fixing of tiles on external & internal surface.
- It can be used for Toilets, Bathrooms, Kitchens, Swimming Pools, Water Tanks, Hospitals, Food Industries, Cold Storage etc.

#### Application Method

- The surface should be free from Oil, Grease, Fungus & Algae.
- Mix powder with water in ratio of 3 parts powder & 1 part clean water.
- Mix it thoroughly & make homogeneous paste.
- Apply this paste with notched trowel on substrate or apply this paste on the reverse side of tiles.
- Press the tile up to 2mm of adhesive mortar thickness to make a good bond with the substrate.
- Remove the excess adhesive from the side of tiles.
- Clean the tiles with damp sponge or cloth.
- If the surface is very smooth then put diluted acid on the surface & then wash it thoroughly with water. It makes surface rough for good tile bonding
- If surface is Oily or Greasy, then wash it thoroughly with detergent solution followed by clean water.

#### Properties :

Colour	:	Grey / White
Mixing ratio with water	:	3 part powder 1 part water
Pot life of mixture	:	3 hrs
Coverage	:	1 Kg/m <sup>2</sup> for 3-mm thick layer
Bed Thickness	:	2 - 3 mm.
Working Time at 30° C	:	30 minutes
Setting Time at 30° C	:	21 hrs.
Temperature Resistance	:	80° C
Packing Available	:	20 Kgs. & 26 Kgs.



**Premium Tilefix - N.S.A. (WHITE)**

Non-skid Polymeric modified tile fixing adhesive.

**Premium Tilefix - N.S.A. (GREY)**

Suitable for Cladding & Flooring

**Regular Tilefix - DIAMOND ( Only GREY)**

Non-skid Polymeric modified tile fixing adhesive.  
Recommended for Flooring & Cladding up to 4 feet.

**Regular Tilefix - DIAMOND ( Only GREY)  
(MORTAR)**

Non-skid Polymeric modified tile fixing adhesive.  
For Flooring Only.

**EXTRA STRONG TILEFIX – N.S.A. (WHITE)**

Premium Quality Tile Adhesive for all Natural Stones like Marble, Granite etc in White Cement.

**EXTRA STRONG TILEFIX – N.S.A. (GREY)**

Premium Quality Tile Adhesive for all Natural Stones like Marble, Granite etc. in Grey Cement.

**Manufactured & Marketed By : Chitra Insultec Pvt. Ltd.**

202, Sarthak Complex-II, Nr. Swastik Cross Road, Navrangpura, Ahmedabad-380009. (Gujarat) INDIA.  
Phone : +91-79-2656 2100 | Telefax : +91-79-2656 4777 | Email : info@weathertuff.com | Web : www.weathertuff.com  
TOLL FREE NO. : 18001239010